

FIG. 1

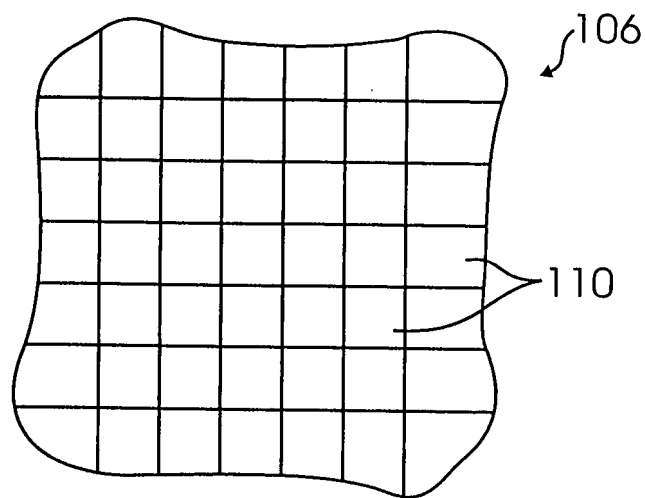


FIG. 2

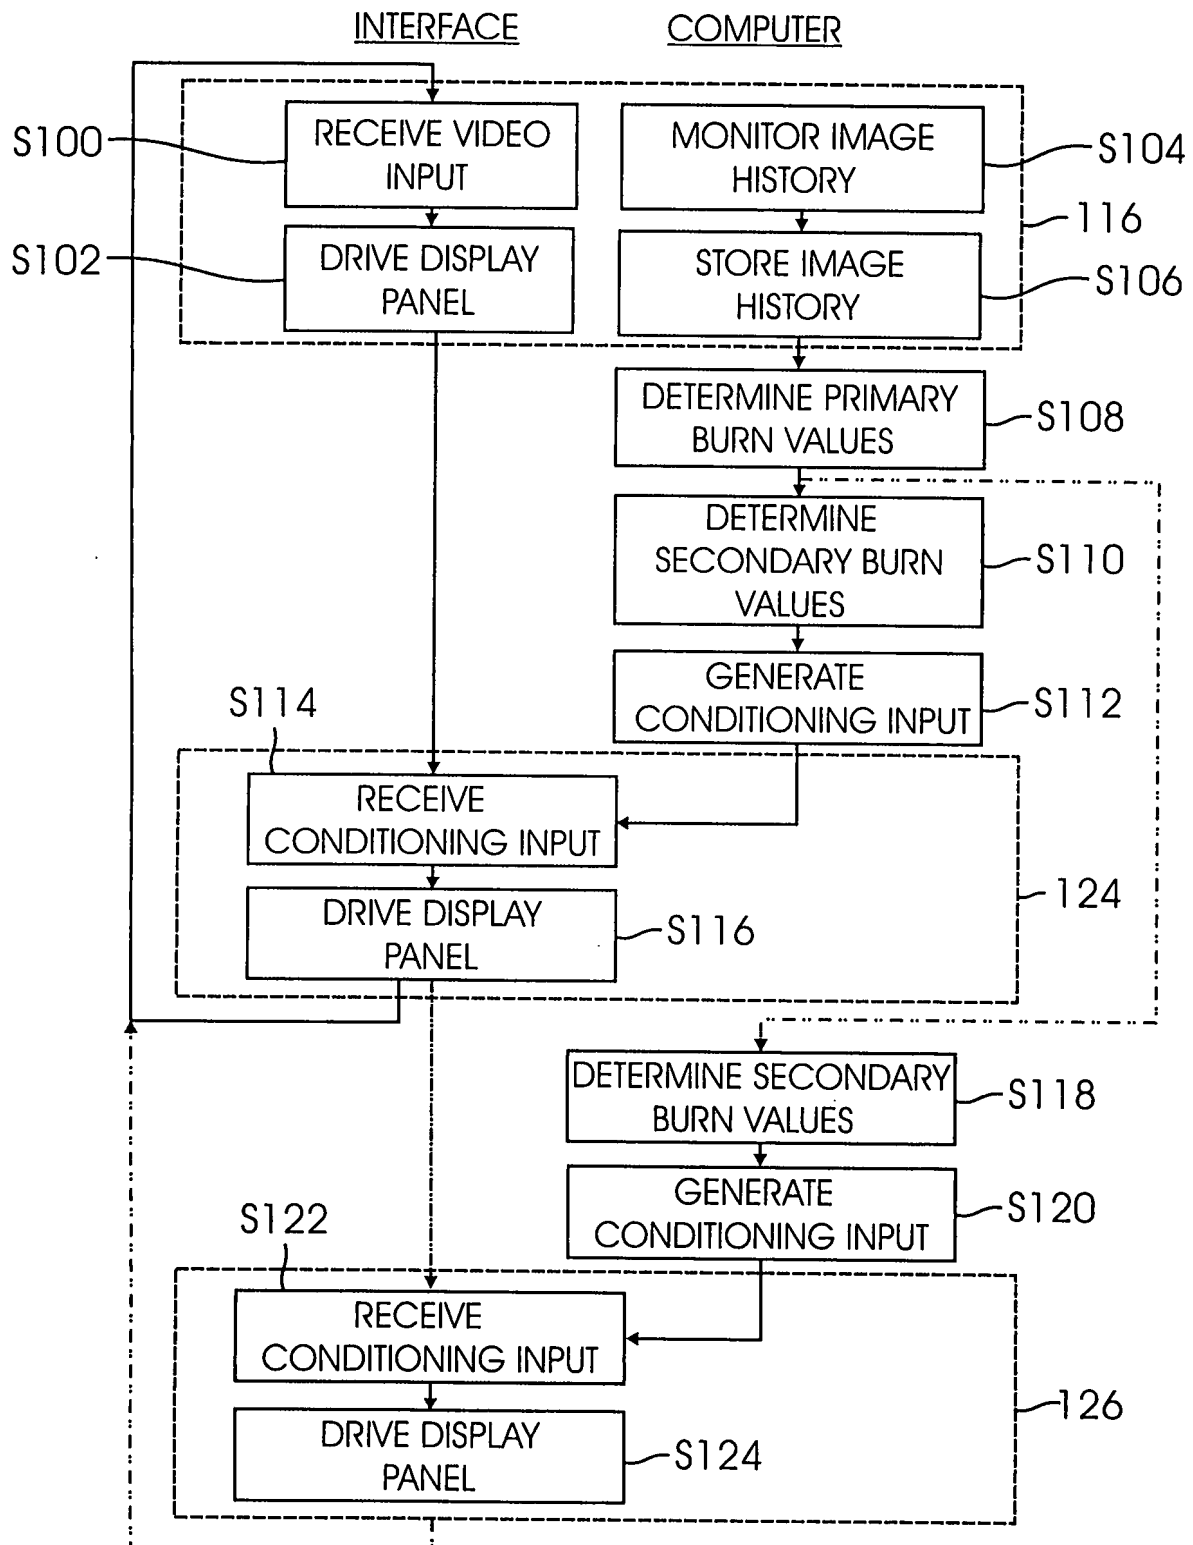
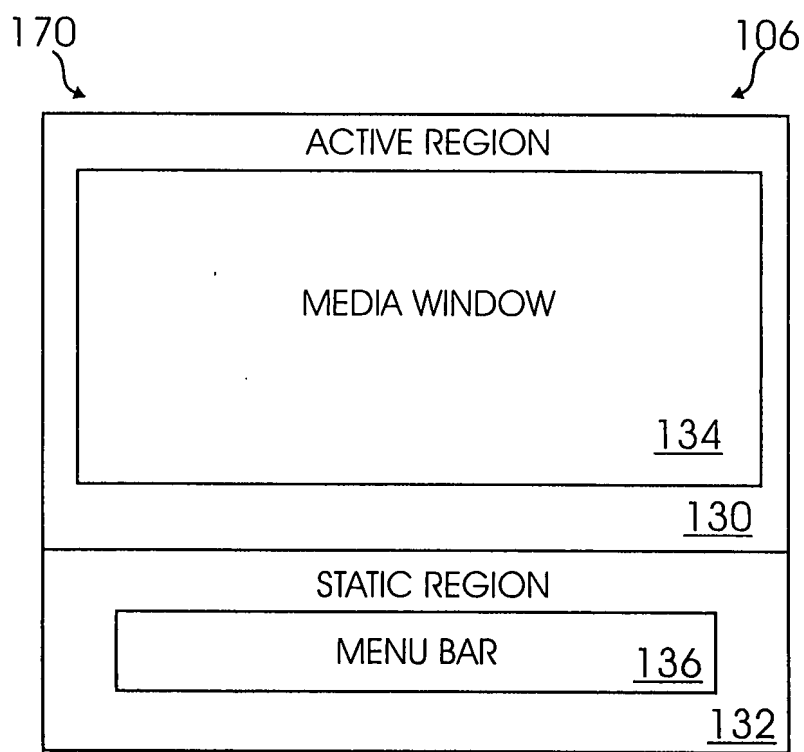
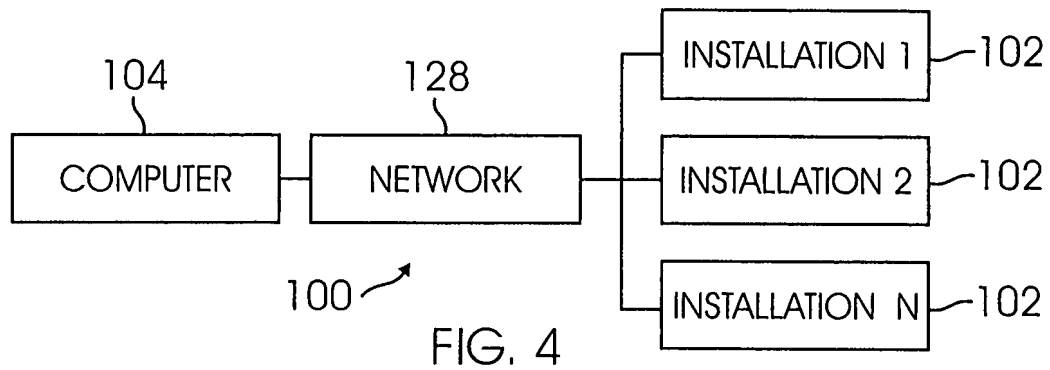


FIG. 3



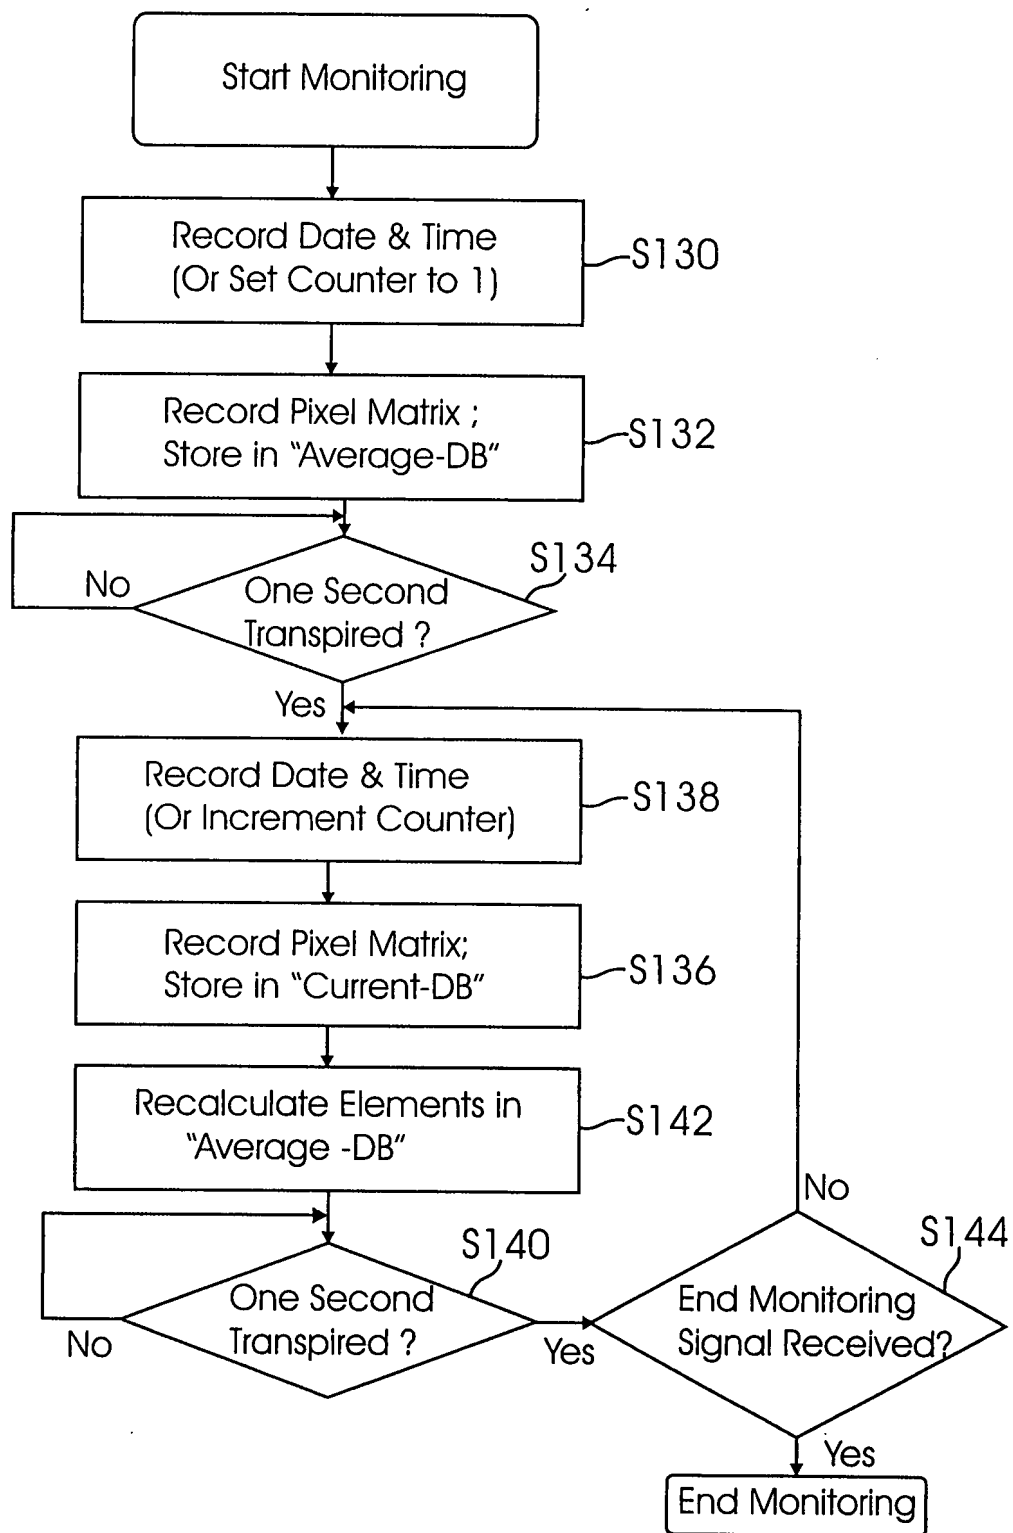


FIG. 6

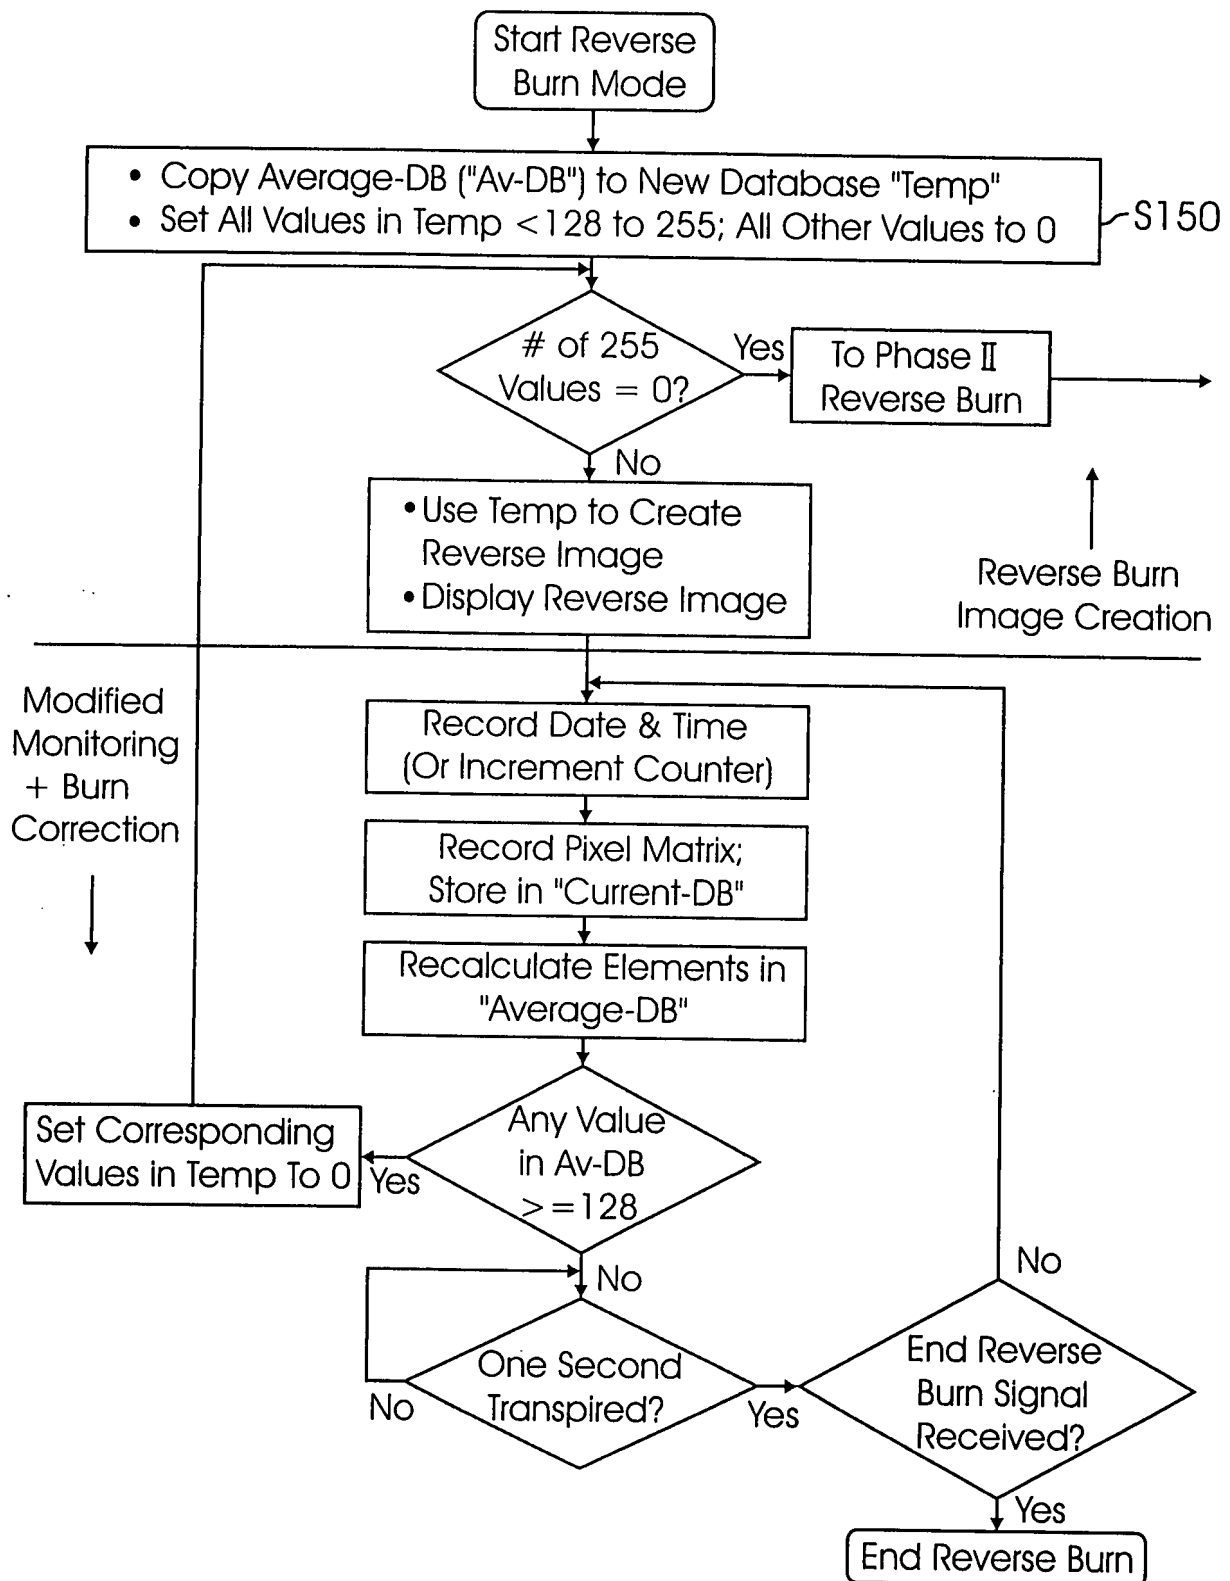


FIG. 7A

Note 1: CMin is the predetermined number of color values above the baseline that require the reverse burn-in process to continue

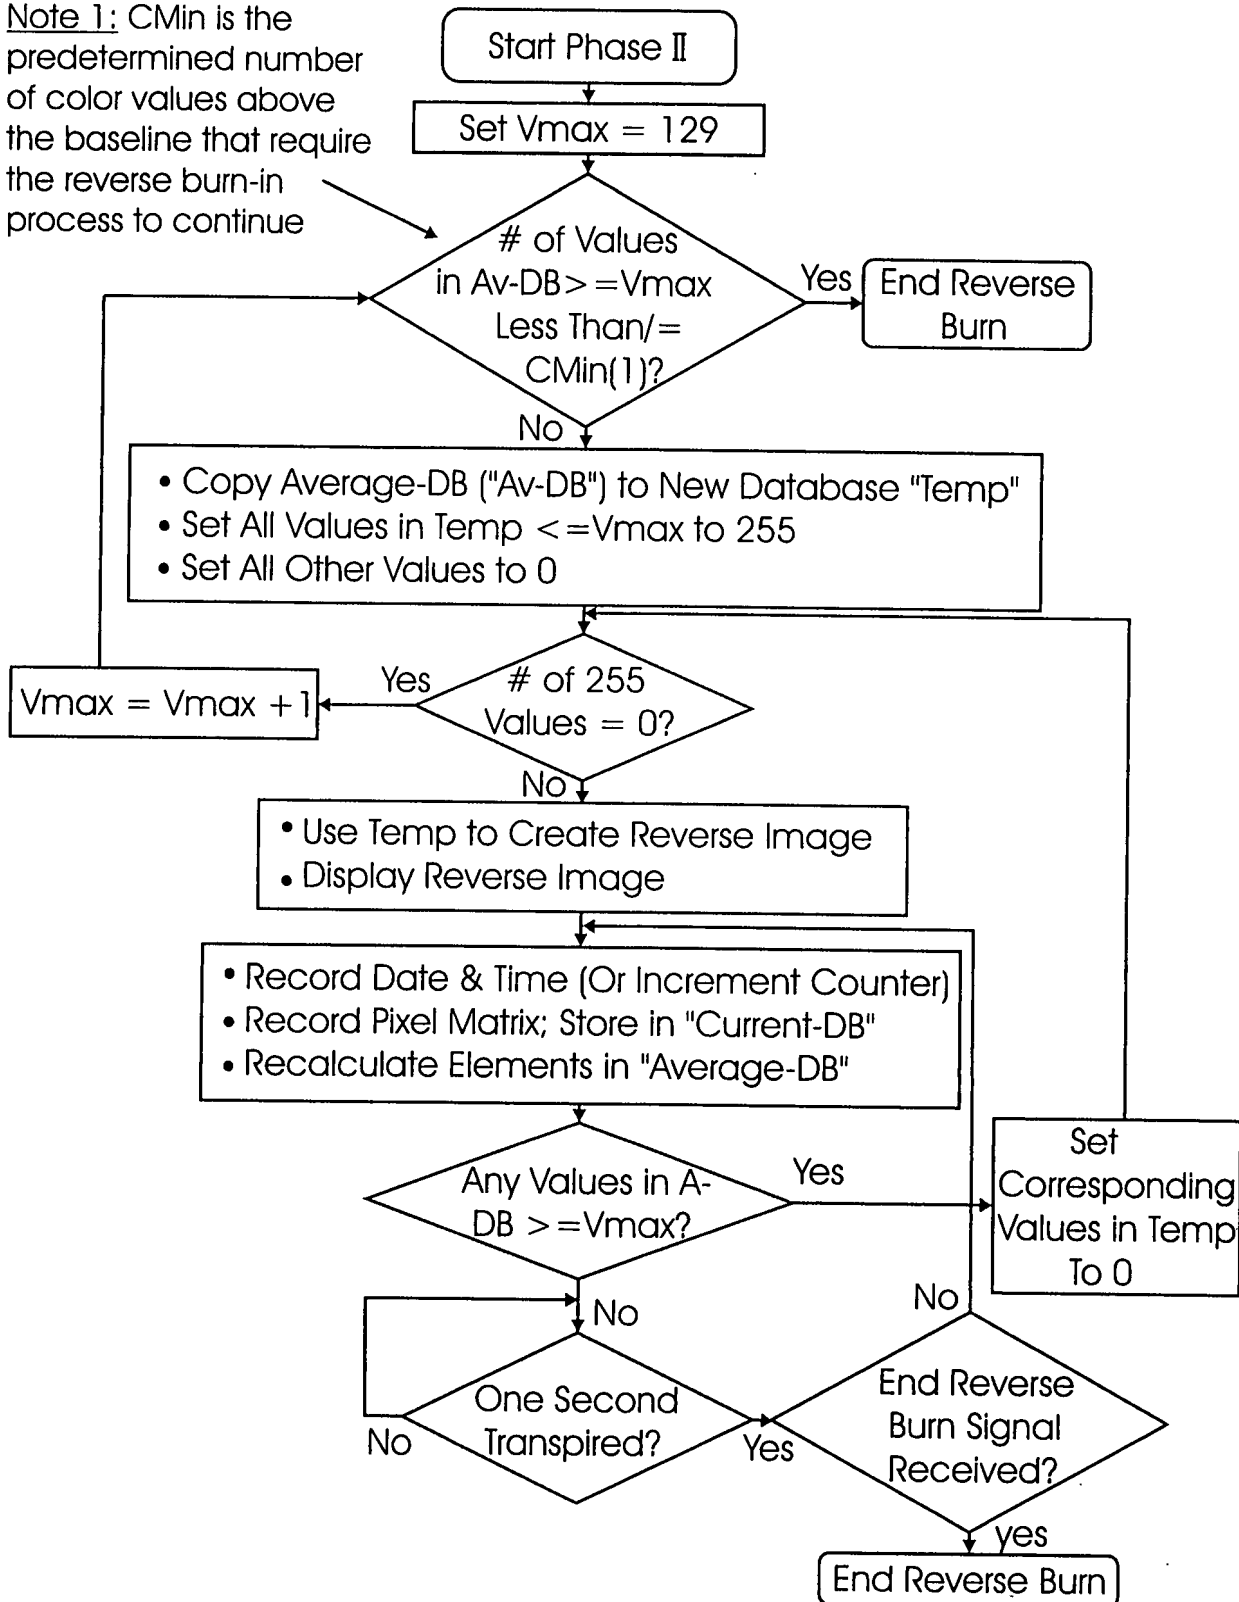
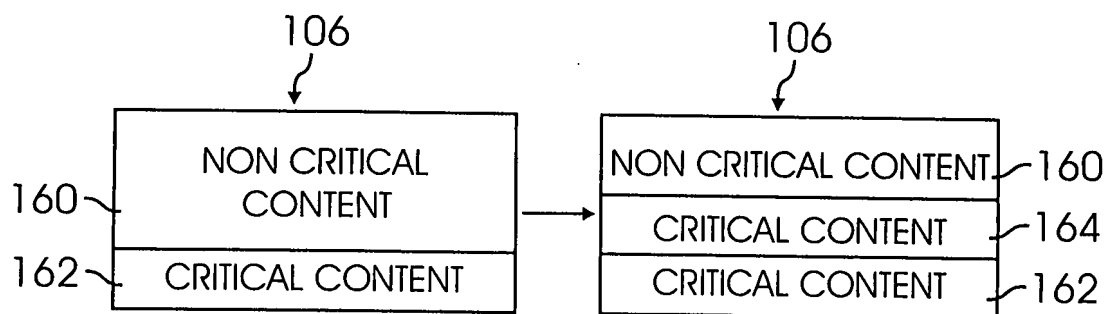
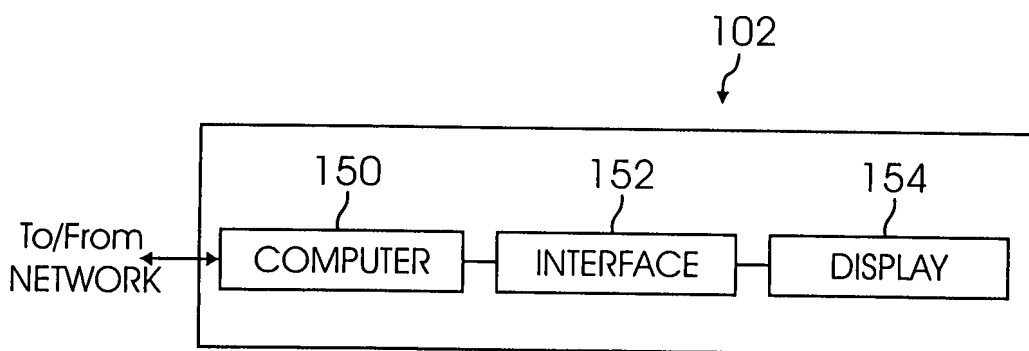
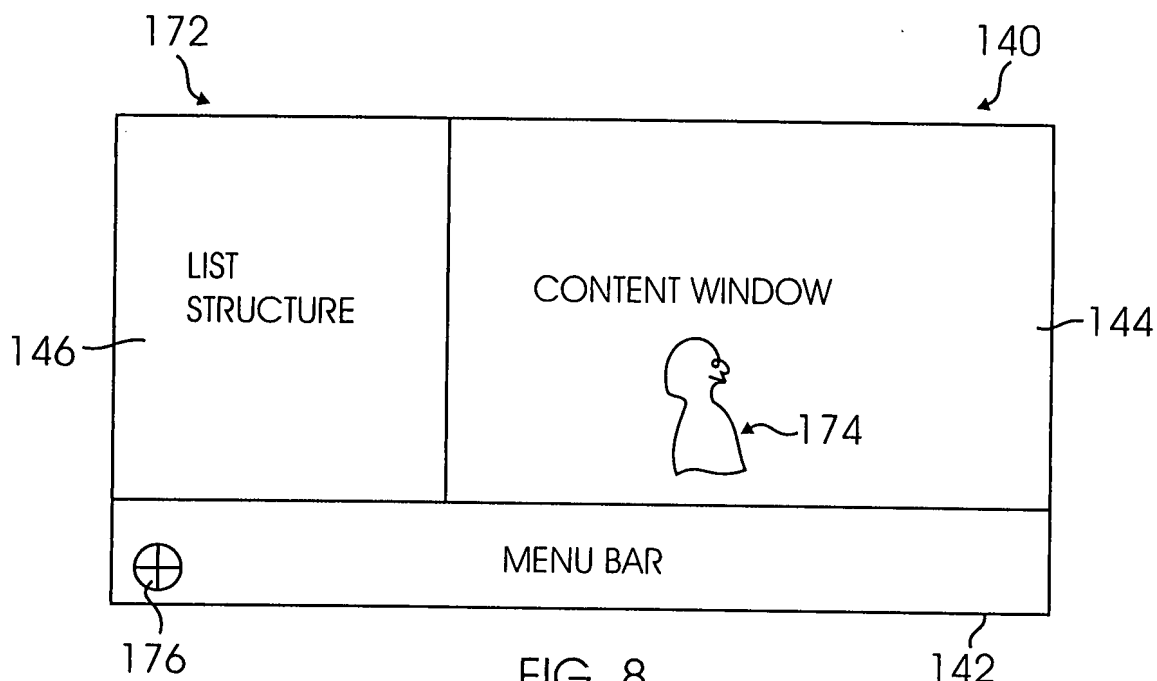


FIG. 7B



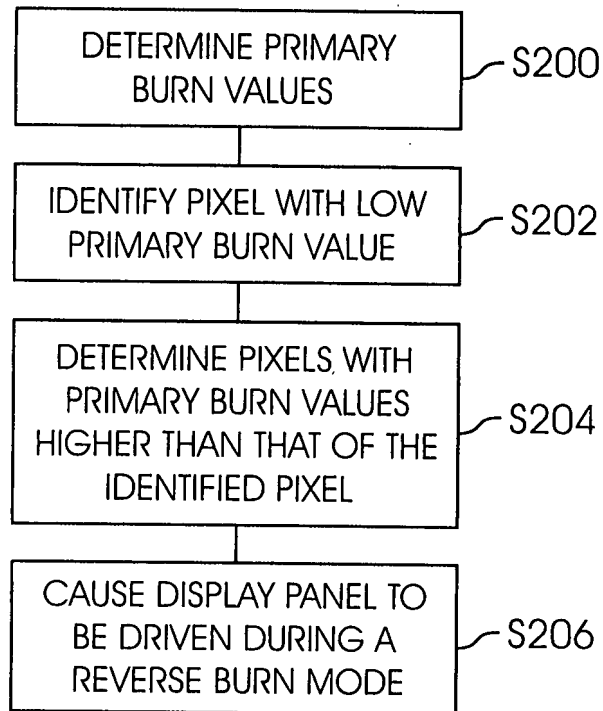


FIG. 11

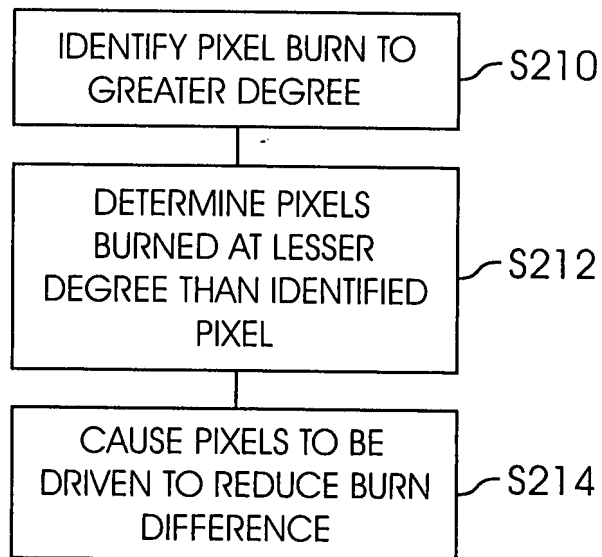


FIG. 12



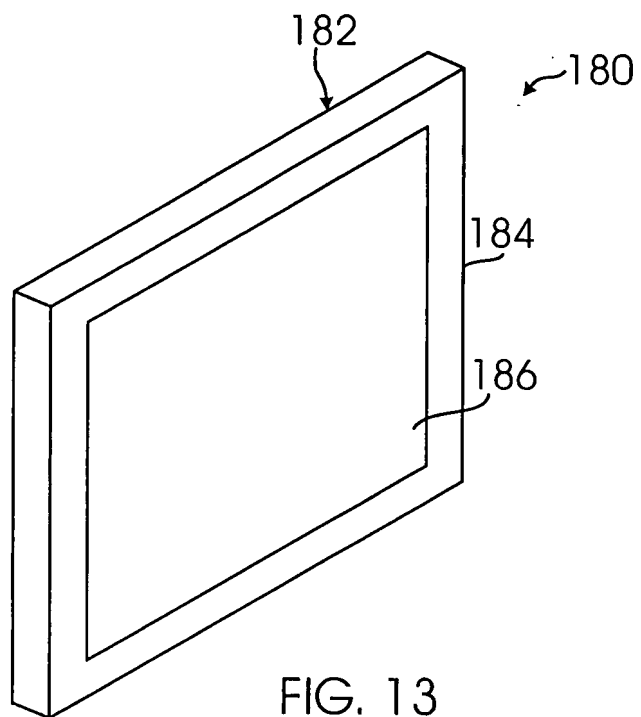


FIG. 13

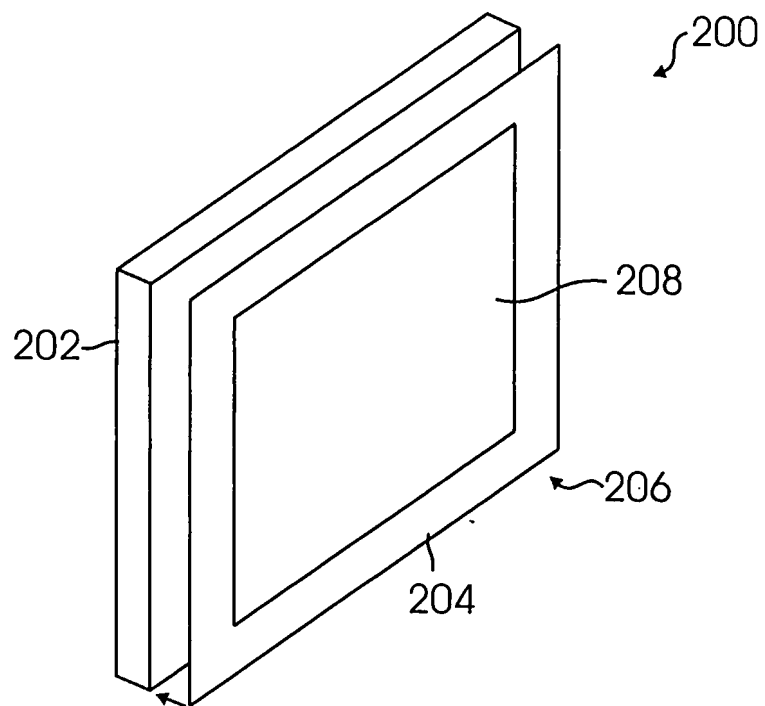


FIG. 15

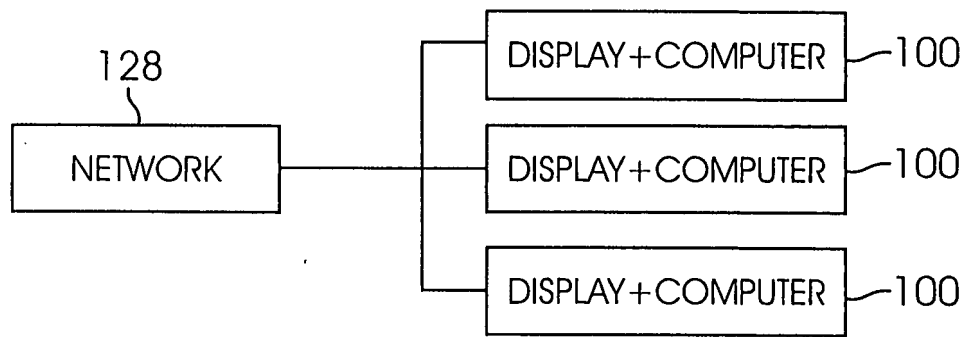


FIG. 16

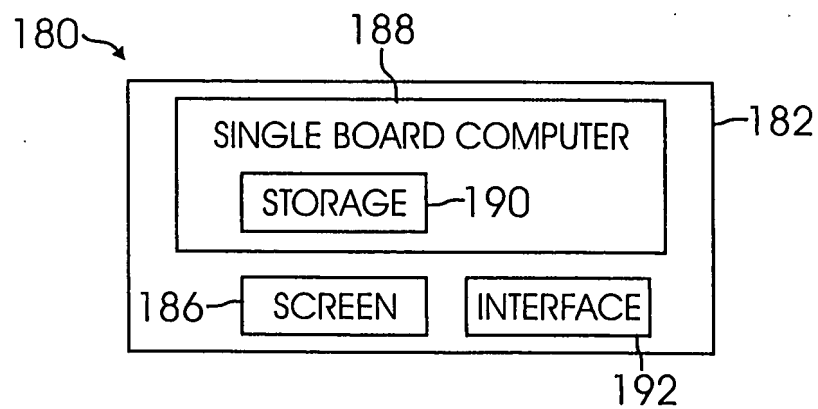


FIG. 14